


MIERKA 1500/100

Stoka AC - zmena

obecná cesta		cesta III/3352				obecná cesta	
19.08	20.70	5.20	68.00	30.50		24.40	22.30
77/265.5°	78	91/97.1°	91A/178.8°	92/171.5°		93/170.9°	94/253.1°

AB/pđvđđđđ

MIERKA 1500/100

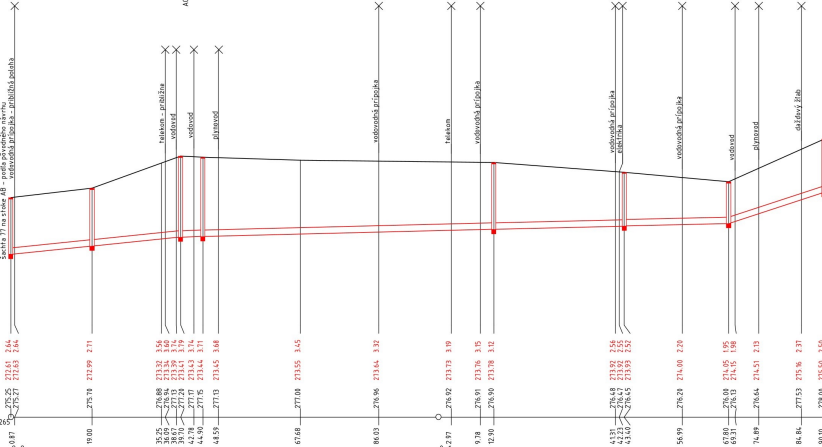

STANIČENIE [km/m]
PROFIL[mm]-MATERIÁL-DĹŽKA[m]
SKLON[promile]-DĹŽKA[m]
ULOŽENIE
KAPACITNÝ PRIETOK[l/s]-RYCHL

DN300-PP-190 10		
28 15-39 70	5 00-128 10	65 04-22 30
pieskové lôžka hr. 150mm		
196 5-2 78	94 7-1 34	359 3-5 08

Stoka AC-2 - zmena

obecná cesta
35.80


AC-zmená

← AC - zmena

← AC-2 (původně)

708

1

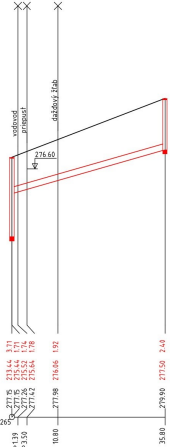AC-змена ~~AC-~~


DN300-PP-35.80
57.65-35.80
piaskové lôžko hr. 150mm
337.8-4.78

Stoka AC-1-1

casta III/3352	
50.00	50.00
91/270 0°	90/178 3°



①

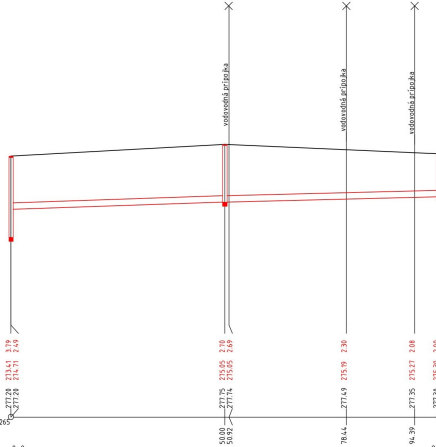

DN300-PP-100.00	
6.80-50.00	5.00-50.00
piasková lôžka hr. 150mm	
111.4-1.58	94.7-1.34